

Best Available Copy

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 6 : B44C 5/04, D21H 27/26, B32B 27/08</p>	<p>A1</p>	<p>(11) International Publication Number: WO 95/06568 (43) International Publication Date: 9 March 1995 (09.03.95)</p>
<p>(21) International Application Number: PCT/US94/09956 (22) International Filing Date: 1 September 1994 (01.09.94) (30) Priority Data: 08/115,062 2 September 1993 (02.09.93) US (71) Applicant: NEVAMAR CORPORATION [US/US]; 8339 Telegraph Road, Odenton, MD 21113 (US). (72) Inventors: O'DELL, Robin, D.; 1372 Water Oak Point, Pasadena, MD 21122 (US). LEX, Joseph; 8304 Laico Court, Pasadena, MD 21122 (US). (74) Agents: RODEWIG, Deborah, S. et al.; Jones, Day, Reavis & Pogue, Northpoint, 901 Lakeside Avenue, Cleveland, OH 44114 (US).</p>		<p>(81) Designated States: AU, BR, BY, CA, JP, KR, NZ, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: DECORATIVE SURFACE LAYER AND PROCESS FOR ITS PRODUCTION

(57) Abstract

A decorative laminate (z) surface layer composition is prepared by selectively applying dissimilar thermoset or thermoplastic polymers (10) to a decorative laminate facing sheet (y) to achieve a brilliant visual or pearlescent appearance. The laminate also exhibits enhanced wearability, chemical, thermal or ultra-violet radiation resistance or abrasion resistance.

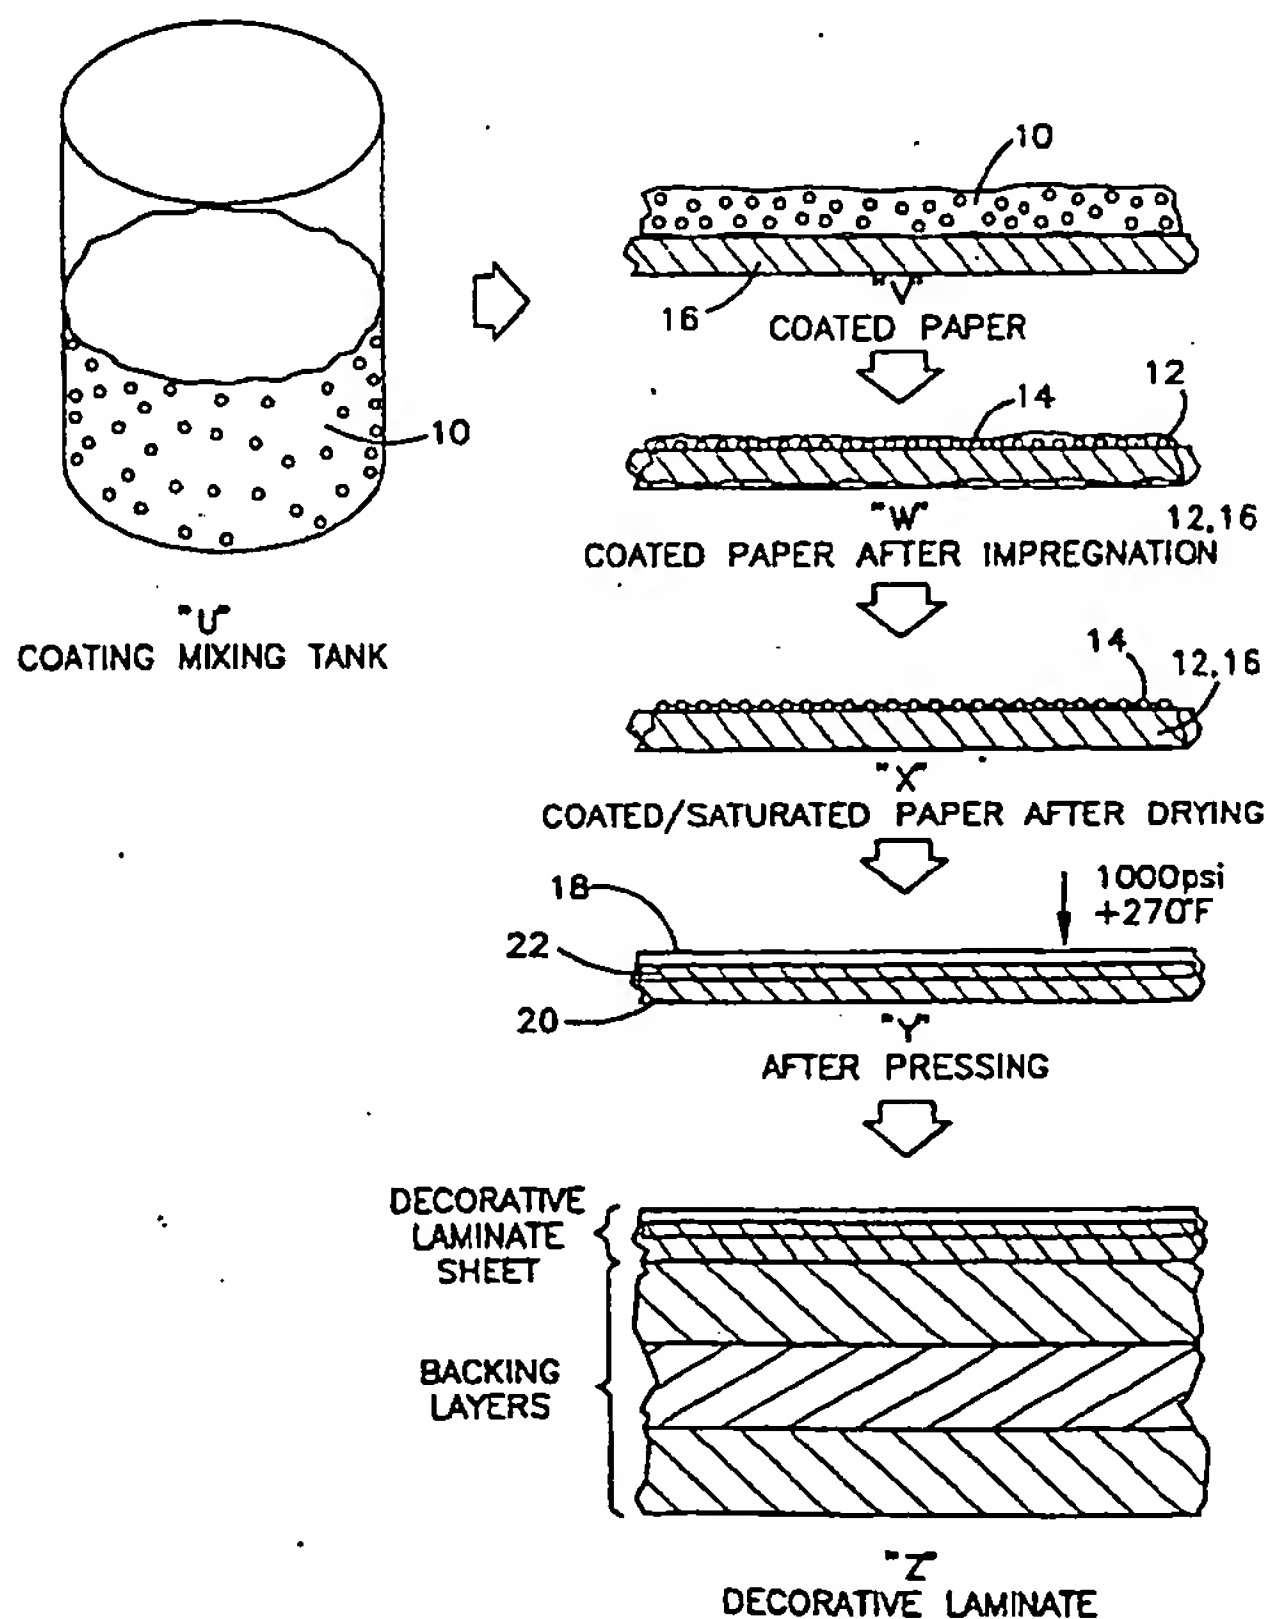

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

-1-

DECORATIVE SURFACE LAYER AND PROCESS FOR ITS PRODUCTION

FIELD OF THE INVENTION

5 The present invention relates to processes for achieving decorative laminates having a surface coating of dissimilar laminate resins. The laminates are suitable for counter tops, wall panels, floor surfacing, tabletops and the like.

10 BACKGROUND

Decorative laminates have been conventionally made by stacking a plurality of layers of paper impregnated with thermosetting resins. Conventional laminates are made of three essential layers: a core layer, a decorative layer, and surface layer. The core or backing layer constitutes a bottom or supporting layer onto which the other layers are bonded. In high pressure laminates, the core layer consists of a plurality of core sheets (for example, 15 three to eight) made from phenolic resin impregnated cellulosic sheets such as kraft paper. The core layers lies a decor sheet impregnated with melamine resin or some other desired impregnating resin such as phenolic, amino, epoxy, polyester, silicone, 20 acrylic and diallyl phthalate resins to name but a few. In low pressure laminates the core layer is more often a sheet of particle board, normally in the range of 3/8 inch to 1 inch thick. It is possible for the core layer for either high or low 25 pressure laminates to made from materials other than paper or particle board, such as cloth (e.g. linen or canvas), wood or mat materials.

The type of decor sheet or decorative facing is dictated by the ultimate product and can be a paper, 30 cardboard, fabric (either woven or felt), or any

-2-

fibrous or cellulosic fiber decorative sheet, such as viscose rayon fiber or wood pulp fibers of high alpha cellulose content, or other decorative material that would provide a desired aesthetic appearance which are well known in the art.

An overlay sheet is provided on top of the decor sheet which, in the laminate, is essentially transparent and provides protection for the decor sheet.

Improvements of this process are disclosed in Scher et. al. U.S. Patent Nos. 4,255,480; 4,263,081; 4,327,141; 4,395,452; 4,400,423; Re. No. 32,152; Ungar et. al. U.S. Patent No. 4,713,138; and O'Dell et al. U.S. Patent No. 4,567,087. These patents are commonly assigned herewith and their disclosures are incorporated by reference herein.

Scher et. al. Re. 32,152 teaches that compositions containing small mineral particles, which when coated without resin over unimpregnated printed paper, provide surprising and unexpected properties permitting such paper to be used in the preparation of decorative laminates without an overlay sheet. The resultant laminates are highly abrasion resistant.

This Scher coating composition is composed of a mixture of small particles of alumina or other abrasion resistant particles of average 20-50 micron particle size, and a lesser amount of micro-crystalline cellulose particles, both dispersed in a stable, aqueous slurry. The particles of alumina, of small size such that they do not interfere with the visual effects in the final product, serve as the abrasion resistant material and the micro-crystalline cellulose particles serve as the preferred temporary binder.

-3-

Scher further teaches that the binder must be compatible with the resin system later utilized in the laminating procedure, usually melamine resin or in the case of certain low-pressure laminates a polyester resin system, and the micro-crystalline cellulose serves this function as well as stabilizing the small particles of alumina of the surface of the print sheet.

Ungar et. al. U.S. Patent No. 4,713,138 teaches the process of depositing onto the surface of a decor sheet an ultra-thin layer of abrasion resistant material, which material is substantially disclosed in U.S. Patent No. 4,255,480, simultaneously with the complete resin saturation of the decor sheet in a single step operation. The resin composition of the Ungar process acts as the carrier for the abrasion resistant material. The abrasion resistant composition consists essentially of an abrasion resistant hard mineral of fine particle size, preferably about 20-50 microns, in quantities sufficient to provide an abrasion resistant layer without interfering with visibility. The abrasion resistant mineral in Ungar is preferably alumina, silica or a mixture thereof. Ungar further teaches the use of a binder material for such mineral. The binder material in Ungar is present in an amount sufficient to bind the abrasion resistant mineral to the surface of the decor sheet. Such binder material is preferably a mixture of micro-crystalline cellulose with a minor amount of carboxy methyl cellulose.

One such binder sold by FMC Corporation under the trademark "AVICEL" is a mixture of approximately 89% micro-crystalline cellulose and 11% carboxy methyl cellulose. The abrasion resistant

-4-

composition suitably contains 1-8 parts by weight of "Avicel" to 4-32 parts by weight of mineral particles preferably at a ratio of mineral particles to binder material of 4:1 to 1:2, and a quantity of
5 1 part of "AVICEL" per 2 parts of mineral particles has been found to be particularly suitable.

Ungar et. al. also teaches that small additional quantities of carboxy methyl cellulose and a small quantity of silane may be added to the
10 composition. Also, it is preferable to include a small quantity of surfactant, as disclosed in U.S. Patent No. 4,255,480, and a small quantity of solid lubricant to provide scuff resistance, as disclosed in U.S. Patent No. 4,567,087 in those compositions.

15 Accordingly, the above discussed patents provide single and two stage processes for providing a thin or ultra thin abrasion resistant laminate surface applied to decor sheets. However, it has been a continuing problem in the industry to provide
20 a chemical, stain and abrasion resistant laminate surface on a decor sheet suitable for horizontal surfaces having certain brilliant visual appearance such as a pearlescent effect.

While considerable activity in the field has
25 led to many decorative surface appearances, these activities resulted in the development of processes and compositions wherein the resin material was impregnated into the structure of the paper and the thin or ultra-thin layers of the laminate resin on
30 the surface. The prior processes have failed to achieve laminate which meet all the international standards for horizontal laminate surfaces while retaining brilliant visual effects and none have achieved a laminate having a pearlescent finish that
35 is suitable for horizontal surfaces.

-5-

SUMMARY OF THE INVENTION

It is an object of this invention to provide products and methods for producing products which overcome the above mentioned problems encountered in this field.

It is a particular object to provide a laminate surface layer composition including a two layer coating of at least two dissimilar resin polymers to achieve desirable wearability, and chemical, thermal, resistance to ultra-violet radiation, as well as resistance to abrasion, while achieving a brilliant visual decorative appearance of the laminate surface layer. This brilliant visual appearance is remarkable for its rich depth of color and luster.

A further object of the present invention is to obtain a true pearlescent appearance in a laminate. The results of this invention are very surprising as the resins used in this invention have long been known in the laminates field. In addition to providing these products, it is yet another object of this invention to provide processes for achieving these laminates.

These and other objects of the invention are achieved by applying a surface coating of a liquid or particulate resin onto a conventional decorative facing sheet (including, prints, solids, foils, etc.) made from any type of desirable material such as paper, fabrics, wood or other cellulosic material. The surface coating resin may be applied as a liquid dispersion of multiple dissimilar polymers, such as a colloid, a mixture of polymer particles suspended in a liquid resin, an emulsion, or an aqueous dispersion of polymer particles in water. Exemplary of suitable polymer particles for

-6-

use herein are polyester, polyurethane, polyvinyl chloride, epoxy, and acrylic, or mixtures thereof. For purposes of this invention the term "particles" or "particulates" is not limited to those materials
5 which are solid at room temperatures.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a flow chart showing a one step method to achieve the present invention using schematic sectional views of the decorative paper
10 and laminate in accordance with the present invention.

Figure 2 is a flow chart showing a two step method to achieve the present invention using schematic sectional views of the decorative paper
15 and laminate in accordance with the present invention.

Figure 3 is a flow chart showing the transfer paper method to achieve the present invention.

Figure 4 is a flow chart illustrating a dry
20 powder deposit method of achieving the present invention.

Figure 5 is a flow chart illustrating a two-sided coating method of achieving the present invention and obtaining an anticurl backing on the
25 decorative sheet.

DETAILED DESCRIPTION OF EMBODIMENTS

With reference to Fig. 1, a one step process is seen. The coating mix tank (U) contains a
30 dispersion of at least two dissimilar resins (10) -- an impregnating resin (12) and a coating resin (14), which will melt and flow under heat and pressure. Coating resin (14) can be a solid particulate or liquid globules insoluble in and dispersed within
35 impregnating resin (12). The dispersion (10) is

-7-

then coated onto the decorative facing sheet (16) as illustrated by coated sheet (V). Impregnating resin (12) soaks into and impregnates the facing sheet (16) which causes the coating resin (14) to be
5 filtered out onto the exterior surface of the facing sheet (16). The coated sheet after impregnation (W) is then dried in the usual manner resulting in coated paper (X). Dried coated sheet (X) which has become impregnated with impregnating resin (12) has
10 a surface coating of coating resin (14). The dried coated and impregnated sheet (X) is then subjected to the usual laminating conditions to form the decorative laminate sheet (Y) which has substantially two surface layers. These two resin
15 layers include a surface layer (18) consisting essentially of coating resin (14) and a second layer (20) consisting of impregnating resin (12) which is contained almost entirely within the sheet. There is a small interface portion (22) within the sheet
20 with contains both resins (12) and (14). The decorative laminate sheet (Y) is then laminated under heat and pressure to the backing layer to produce the decorative laminate (Z).

It is understood that an impregnating resin is
25 a resin that permeates into the decorative facing sheet material and, when the appropriate backing layer is used, into the backing layer as well. The backing layer for this invention can be any of a number of supporting substrate material, including
30 layered kraft paper, cardboard, particle board, fabric (woven, non-woven and felts), mat materials, wood products or other supporting substrate materials as would be dictated by the ultimate use of the final product. The decorative facing sheet
35 suitable for this invention can be one of any number

-8-

of materials, including paper, foils, fabrics
(woven, non-woven and felt materials) or wood
products and would depend on the ultimate aesthetic
and performance requirements for the finished
5 product.

With reference to Fig. 2, the two step process
is seen. The coating mixing tank (L) contains a
dispersion (5) of an aqueous mixture and coating
resin (14), which will melt and flow under heat and
10 pressure. Coating resin (14) can be a solid
particulate or liquid globules insoluble in and
dispersed within the aqueous mixture. The
dispersion (5) is then coated onto the decorative
facing sheet (16) as illustrated by coated sheet
15 (M). The facing sheet (16) is then dried in the
usual manner to produce dried coated sheet (N).
Dried coated sheet (N) is then coated, saturated and
impregnated with impregnating resin (12) to form
saturated sheet (O) where upon the impregnated
20 facing sheet is then subjected to normal laminating
conditions to produce the decorate laminate sheet
(P) which has substantially two surface layers.
These two resin layers include a surface layer (18)
consisting essentially of coating resin (14) which
25 has substantially displaced impregnating resin (12)
on the surface. A second layer (20) consists of
impregnating resin (12) which is contained almost
entirely within the sheet. There is a small
interface portion (22) within the sheet with
30 contains both resins (12) and (14). The decorative
laminate sheet (P) is then laminated under heat and
pressure to the backing layer to produce the
decorative laminate (Q).

-9-

In Figure 3 the transfer sheet process is seen. In this process an aqueous solution containing the surface coating resin particles and a binder (30) is spread onto one side of the transfer or release
5 paper (32) and dried. The coated transfer paper (40) is then placed over the surface of a resin impregnated decorative facing sheet (34), which is on top of the supporting substrate or backing layer (36). The throw away portion (42) of the transfer
10 paper (32) is removed and the layered remaining materials can be used to form a laminate (38). This is usually done as in a high pressure laminating process (about 800 to 1500 psi) or a low pressure lamination process which is typically used when the
15 supporting substrate is a particle fiber board or wood substrate. The temperature will vary depending on the resins used and would be readily known by one skilled in this art.

Figure 4 illustrates another method of
20 achieving the present invention. Figure 4 shows how the surface coating resin particles (50) are sprinkled via shaker tray (46) over the wet impregnating resin formulation coated on the decorative facing sheet (52). The wet resin
25 decorative facing sheet is being transported along a conveyor system (44) into an oven (48), wherein the

-10-

surface coating resin particles are secured onto the surface of the facing sheet by drying the wet resin. The decorative facing sheet is then ready to be used on any type of desirable support substrate or
5 backing layer to form a laminate in the conventional way.

Figure 5 illustrates a method of achieving the present invention that also achieves a decorative facing sheet that will not curl during handling. In
10 Figure 5 a first slurry mixture (61) containing the surfacing coating resin particles is applied on a first surface of the decorative facing sheet (62) and another slurry mixture containing an impregnating resin (63), that may have the same
15 composition as the first slurry mixture or may have a different composition, is applied to a second surface of the decorative facing sheet (62). The first coating (61) can be melamine, the coating described in U.S. Patent Re. No. 32,152 or can be
20 the coating having at least two dissimilar resins wherein the one resin melts and flows under heat and pressure as disclosed herein. The resin coatings are permitted to dry or are dried on the facing sheet (64) in an oven where it is then ready for use
25 in conventional high or low pressure laminating to

-11-

make a laminate (66) having a supporting substrate or backing layer.

All of the above described processes can be used in high and low pressure laminates and/or for use with transfer foils, wall covering (fabric, paper or non-woven backed), acrylic films, wood veneers, flooring materials and exterior siding materials.

PREFERRED EMBODIMENTS

10 The product produced in accordance with this invention includes a decorative facing sheet laminated onto the exterior surface of a backing layer and a coating layer that is an integral part of the laminate on the exterior surface of the
15 facing sheet to form an outer surface thereon.

The coating layer is made from at least one polymer particulate resin that melt and flow under heat and pressure and which is dissimilar from the laminate impregnating resin. To achieve a
20 pearlescent appearance, the exterior coating layer should have a refractive index in the finished cured laminate dissimilar from the refractive index of the pearlescent ink on the decorative facing sheet.

Such coating may optionally contain a mixture
25 of an abrasion resistant mineral and a stabilizing suspending agent or binder material for said

-12-

mineral. The abrasion resistant mineral has a particle size of between 1-200 microns and is present in the mixture in a concentration sufficient to provide abrasion resistance without interfering
5 with visibility.

In a preferred form, the coating layer of this invention includes a mixture of small particles of alumina or other abrasion resistant particles of between about 1-200 micron particle size, polymer
10 particulates of between sub-micron and 250 micron particle size and a lesser amount of micro-crystalline cellulose particles, all dispersed in a stable, aqueous slurry composition. To achieve a pearlescent appearance, the polymer particulates
15 have a refractive index in the finished cured laminate dissimilar to the refractive index of the pearlescent ink on the decorative facing sheet. When using the polymer particulate coating dispersion, the particulates are present in the
20 dispersion such that they melt and flow at the elevated temperatures and pressures of the laminating process.

The particles of alumina or other abrasion resistant particles are of a small size such that
25 they do not interfere with the visual effects in the final product and serve as the abrasion resistant

-13-

material. The micro-crystalline cellulose particles serve as the preferred temporary binder material or suspending agent. It will be understood that the binder material or suspending agent must be

5 compatible with the impregnating resin later utilized in the laminating procedure, usually melamine resin, or in the case of certain low-pressure laminates, a polyester resin. The micro-crystalline cellulose serves this function as

10 well as stabilizing the small particles of alumina of the surface of the print sheet.

The preferred coating layer composition contains a mixture of small particles of alumina and the polymer particulates and a lesser amount of

15 micro-crystalline cellulose particles, all dispersed in water creating a slurry. There must be an amount sufficient of the binder material or suspending agent, such as a micro-crystalline cellulose, to retain the mineral particles and polymer

20 particulates in place on the surface of the decor facing sheet. The binding material should be able to withstand the subsequent laminating conditions. In general, it has been found that satisfactory results are attained with about 5 to 10 parts by

25 weight of the micro-crystalline cellulose for about 20-120 parts by weight of the alumina and polymer

-14-

particulate. However, it is possible to work outside this range. The quantity of water in the slurry is also dictated by practical considerations, since if there is too little water, the slurry
5 becomes so thick that it is hard to apply. Similarly, if there is too much water, the slurry becomes so thin that it is difficult to maintain a consistent thickness during the coating operation due to running of the slurry. Thus, a slurry
10 containing about 2.0 wt % micro-crystalline cellulose and about 24 wt % alumina and polymer particulates, based on the amount of water, is stable, i.e., the alumina does not settle out; but if more than about 3.5 wt % micro-crystalline
15 cellulose and about 24 wt % alumina and polymer particulates, based on the amount of water, is used, the slurry becomes very thixotropic and difficult to apply.

The slurry composition also preferably contains
20 a small amount of wetting agent, preferably a non-ionic wetting agent, and a silane. The quantity of wetting agent is not critical, but only a very small amount is desirable and excess quantities provide no advantage and can cause disadvantages
25 during processing. The silane acts as a coupling agent which chemically binds the alumina or other

-15-

inorganic particles to the melamine matrix after impregnation and curing. The use of silane provides better initial wear since the alumina particles are chemically bound to the melamine in addition to
5 being mechanically bound thereto and therefore stay in place longer under abrasive wear. The particular silane used should be selected from among the group making it compatible with the particular laminating resin used. (See the 1976-77 Edition of Modern
10 Plastics Encyclopedia, Page 160, which lists some silanes useful with melamine and polyester systems.) In this regard, silanes having an amino group, such as gamma-aminopropyltrimethoxy silane, are particularly effective for use with melamine resins.

15 The quantity of silane used need not be great and, in fact, as little as 0.5% based on the weight of the alumina is effective to enhance the abrasion resistance of the final laminate. A maximum quantity of about 2% by weight based on the weight
20 of the alumina or other particles is suggested since greater quantities do not lead to any significantly better results and merely increase the cost of the raw materials. The decorative paper is then
25 laminating resin, usually a thermosetting resin.

-16-

The polymer particulates can be selected from any of the traditional laminating resins. Enhanced wearability, chemical, thermal, resistance to ultra-violet radiation, and resistance to abrasion is possible by selecting the appropriate coating resin for a specific property. For instance, a vinyl-ester may be selected if a high resistance to mineral acids and mineral basis is desired. An acrylic may be selected for ultra-violet radiation stability. An epoxy may be selected if thermal resistance is desired and for a high chemical and stain resistance properties. In order to achieve the brilliant visual pearlescent effect, it is important to select a resin having a refractive index in the finished cured laminate dissimilar from the refractive index of the pearlescent ink on the decorative facing sheet being used. The selection of polymer particulates is preferably made from the group consisting of polyester, polyurethane, epoxy, polyvinyl chloride and acrylic, or mixtures thereof. In addition to alumina, abrasion resistant particles may be mineral particles such as silica, zirconium oxide, cerium oxide, glass beads and diamond dust or mixtures thereof.

Another preferred method for achieving the objects of this invention is by the process of

-17-

depositing on the surface of a decor sheet a dispersion of liquid dissimilar resins or layer of polymer particulates simultaneously with the complete resin saturation of the decor sheet in a single step operation, in which the resin may optionally act as a carrier for the abrasion resistant material.

This process by which the present invention is achieved is best described as follows:

10 (a) preparing a coating dispersion of at least two dissimilar resins, wherein the first of said dissimilar resins is an impregnating resin and wherein the second of said dissimilar resin is the surface coating resin which melts and flows under heat and pressure, and a binder material that can retain the second dissimilar resin on the exterior facing surface of the decorative facing sheet and that is compatible with said impregnating resin and that will withstand subsequent laminating conditions;

(b) coating and impregnating an unsaturated decorative facing sheet in at least one step by coating said coating dispersion over the exterior facing surface of said sheet at a rate such that said unsaturated sheet becomes substantially saturated with said impregnating resin, and the

-18-

second dissimilar resin is filtered onto said facing surface; and

(c) drying said coated and impregnated decorative sheet to obtain a decorative sheet
5 suitable for pressing.

Optionally, a hard mineral of fine particle size in a concentration sufficient to provide abrasion resistant layer without interfering with visibility may be added to the coating mixture. The
10 hard mineral that may be used in the coating composition is of fine particle size, preferably between about 1-200 microns, and used in quantities sufficient to provide an abrasion resistant layer without interfering with visibility. The hard
15 mineral is preferably alumina, silica, zirconium oxide, cerium oxide, glass beads, and diamond dust or mixtures thereof. When using a hard mineral in the coating mixture, a binding material or suspending agent for such mineral may be necessary
20 to retain the mineral particle on the exterior surface of the decorative facing sheet. The binder material or suspending agent should have the properties of being able to withstand the subsequent laminating conditions and wherein said binding
25 material or suspending agent is compatible with the impregnating resin. Such binding material or

-19-

suspending agent is used in an amount sufficient to bind the abrasion resistant mineral to the surface of the decor sheet.

The dissimilar resins may be either in liquid
5 or particulate form. The coating resin that must melt and flow under heat and pressure in (a) above are selected from the group consisting of polyester, polyurethane, epoxy, polyvinyl chloride, and acrylic, or mixtures thereof. It is understood by
10 the expression "melt and flow" that many liquid materials need no further melting in order to flow sufficiently. In order to achieve the brilliant visual pearlescent effect, it is important that the coating resin be a resin having a refractive index
15 in the finished cured laminate dissimilar from the refractive index of the pearlescent ink on the decorative facing sheet being used.

The binding material or suspending agent is preferably a mixture of micro-crystalline cellulose
20 with a minor amount of carboxy methyl cellulose; "AVICEL" is sold as a mixture of approximately 89% micro-crystalline cellulose and 11% carboxy methyl cellulose. The coating composition suitably contains 1-8 parts by weight of "AVICEL" to 4-32
25 parts by weight of the combination of the mineral particles and polymer particulates preferably at a

-20-

ratio of mineral particles to binding material or suspending agent of 4:1 to 1:2, and a quantity of 1 part of "AVICEL" per 2 parts of mineral particles has been found to be particularly suitable. It is also possible to add small additional quantities of carboxy methyl cellulose (or none whatsoever) and a small quantity of silane as binder materials. It is preferable to include a small quantity of surfactant, as disclosed in U.S. Patent No. 4,255,480, and a small quantity of solid lubricant to provide scuff resistant, as disclosed in U.S. Patent No. 4,567,087.

There are six important variables in the formulation, three of which are independent and three of which are dependent. The data presented in Table 1, below, helps define the parameters. Decor paper weight, resin content and weight of the abrasion resistant composition are all independent of the formulation. The requirements for these variables are set by outside factors such as color, degree of final saturation, and abrasion resistance. Resin weight (dry) per ream is dependent on a combination of paper basis weight and desired resin content. Viscosity is dependent on the total volume of the mixture versus the content of abrasion-resistant composition. For complete

-21-

saturation of the decor paper at the coater, the mixture viscosity should be less than 1000 centipoise for porous paper, preferably in the range of 50-100 centipoise depending on paper porosity.

5

Table I
Coating Variable Comparison
For Coated/Saturated Decor Papers

10

	65 lb. Solid	80 lb. Solid	65 lb. 2Printed
15			
	Total % Add On (resin content)	52%	52%
	Volatile Content (approximate)	6%	6%
20	Primary Resin (melamine)	61 lbs.	61 lbs.
	Secondary Resin (polyester)	2 lbs.	2 lbs.
	Suspending Agent (Avicel)	0.7 lbs.	1.7lbs.
	Mold Release (Infernol)	0.01 lbs.	0.01lbs.
	Anti Foam Surfactant	0.04 lbs.	0.04 lbs.
25	Catalyst (Naccure)	0.09 lbs.	0.09 lbs.
	Abrasion Resistant Mineral (Al ₂ O ₃)	2.00 lbs.	5.00 lbs.
30	Total Coat Weight per 3000 sq. ft.	65.21 lbs.	69.54 lbs.
	Viscosity of formula required for good saturation	50-100cps	50-100cps
35	Approximate viscosity prior to addition of water	400 cps	1800 cps
	Approximate water added to Reduce to 50-100 cps	75 lbs.	90 lbs.
40			

From Table I above, it will be noted that the higher the basis weight of the decor paper, a greater volume of liquid resin is required. This yields a corresponding lower final viscosity on the 80 pound paper coating as compared to the 65 pounds paper coating.

45

-22-

One preferred embodiment of the present invention uses finely ground particulates of polyester resin applied at a rate about two pounds per ream of decorative laminate facing sheet. Either thermoplastic or thermoset
5 resins may be used and the selection of which, depends on the final physical or chemical properties desired. Other embodiments include the use of polymer particulates made from polyurethane, epoxy, polyvinyl chloride, melamine and acrylic resins, or mixtures thereof in a melamine or
10 a polyester resin. It is also possible to apply the coating resin in an amount as low as one pound per ream and as high as sixty pounds per ream of decorative laminate facing sheet.

The following examples are offered illustratively:

15

Example I

This example illustrates one method and composition
20 that achieves a pearlescent appearance on a laminate surface. Warm 150 gal. melamine resin at 100°F ± 5°F is placed in a container under a low shear mixer. The melamine has a density of 1.15 and 37.7% solids. TRITON CF21 surfactant in an amount of 0.001 part by weight is
25 added per 192.8 lbs. of liquid resin. Mixing is continued at a high speed for 5 minutes. 9.86 lbs of AVICEL and 0.87 lbs Emerest 2652 (anti-foam) are rapidly added in a manner as to avoid clumping or the formation

-23-

of lumps. Immediately thereafter 38.76 lbs of polyester particulates made from the Morton 23-9036 and 24.66 lbs of 45 alumina are added rapidly and completely in less than three minutes.

- 5 The viscosity is measured and 70 gal. of water is added to provide a viscosity of no greater than 150 centipoise (Brookfield viscometer #3, spindle at 12 rpm).

Printed decor paper weighing 65 lbs/ream is coated with the composition at the rate of 196.1 lbs/ream. This
 10 gives an approximate 2 lbs/ream coating of the polyester resin. A ream of paper in the present field is 3,000 ft². The paper is dried at an elevated temperature and is ready for use in the manufacture of laminates. The laminate was prepared in the usual practice.

15

Examples II, III, IV and V

Example I was followed above using 35.2 lbs of Glidden 2C-114 (epoxy), 4C-104 (acrylic), 5C-104
 20 (polyester) and Morton Polyester 23-9036 in the following mixtures:

Batch Formulations

25		II	III	IV	V
	Melamine resin (liquid)				
	63% solids	150 gal.	150 gal.	150 gal.	150 gal.
	Water	70 gal.	70 gal.	70 gal.	70 gal.
	Emerest 2652 Surfactant	3.5 lbs.	3.5 lbs.	3.5 lbs.	3.5 lbs.
30	Avicel	11.0 lbs.	11.0 lbs.	11.0 lbs.	11.0 lbs.
	Aluminum oxide, 40 micron	70.5 lbs.	70.5 lbs.	70.5 lbs.	70.5 lbs.
	Mold release (Infernol)	1 lbs.	1 lbs.	1 lbs.	1 lbs.
	Morton polyester 23-9036	35.2 lbs.	--	--	--
35	Glidden polyester 5C-104	--	35.2 lbs.	--	--

-24-

Glidden acrylic 4C-104 -- -- 35.2 lbs. --
 Glidden epoxy 2C-114 -- -- -- 35.2 lbs.

The following table illustrates by comparison how

5 well the present invention achieves the
 international standards for horizontal laminate
 surfaces while retaining brilliant visual effects.

Pearlescent Printed Paper

Typical Values

10

	Composition NEMA Test Methods	NEMA Standard	No Overlay	With Overlay	A
15	Wear value	400 cycles/min.	25 c/m	450 c/m	825 c/m
	High-temp resistance	Slight	NE	NE	NE
	Hot water	NE*	NE	NE	NE
	Dimensional change	.5 MD/.9 CD	.06/.69	.06/.69	.06/.69
	Impact	50 in. min.	66 in.	66 in.	66 in.
20	Conductive heat	NE	NE	NE	NE
	Cigarette resistance	125 min.	220 min.	220 min.	220 min.
	Light Stability	Slight	NE	NE	NE
	Stain	NE:1-23/Mod:24-29	NE	NE	NE
	Scuff resistance	NE	Severe	NE	NE
25	Visual appearance	--	Bright- Excellent Pearles- cent Appearance	Dull-No Visual Bright	Bright- Excellent Pearles- cent Appearance
30					

*NE = No effect

"No Overlay" is a melamine surface alone.

35 "With Overlay" is a standard construction of an alpha-cellulose
 paper impregnated with melamine on the surface of the laminate.

This comparative test illustrates
 the advantages of the present invention. The
 pearlescent printed paper without a protective
 40 overlay has a desirable appearance but lacks
 required durability. The standard construction with
 an overlay has desirable durability but lacks the
 brilliant pearlescent appearance.

-25-

It is only with the present invention, Composition A, that both the desired durability characteristics is achieved in a laminate having a brilliant pearlescent appearance.

5

Example VI

The following coating surface dispersion formula is used in the two step laminate process wherein a surface coating dispersion is applied to the exterior surface of the decorative facing sheet which has been applied into the exterior side of the backing layer. After each decorative facing sheet was coated with the surface coating mixture, the coated decorative sheet was dried in the usual manner whereupon the coated decorative sheet was saturated with melamine thermosetting resin and pressed to form the laminate.

Coating Surface Batch Formulation

20	Cold Water	417	grams
	CMC-7M	2.5	grams
	AVICEL	7.5	grams
	Alumina particulates, 20 microns	30	grams
25	Morton Polyester 23-9036	30	grams
	Ultraviolet tracer PWA @100%	0.28	grams
	Acetic Acid @5.6%	0.95	grams
	Formaldehyde @37%	<u>0.28</u>	<u>grams</u>
30	<u>Woodgrain-1</u>	<u>US20* (3.5 lbs/ream)US40* (7.0</u>	
	<u>lbs/ream)</u>		
	Initial Point	50	50
35	Final Point	175	350
	Wear Value	173	200

-26-

	<u>Woodgrain-2</u>	<u>US20 (3.5 lbs/ream)</u>	<u>US40 (7.0</u>
	<u>lbs/ream)</u>		
	Initial Point	125	50
5	Final Point	200	275
	Wear Value	163	163
	<u>Woodgrain-3</u>	<u>US80* (14.3 lb/ream)</u>	<u>US90* (15.5</u>
	<u>lb/ream)</u>		
10	Initial Point	100	125
	Final Point	500	525
	Wear Value	300	325
	Rate of Wear	0.036 grams	0.037 grams

15 *Mayer Bar Coating Technique. It is understood by those skilled in the art that this is a technique to vary coating weight.

20

EXAMPLES VII - IX

The Coating Surface Batch Formulation provided in Example VI can be prepared substituting the 30 grams of Morton Polyester 23-9036 with the polymer particulates made from the following resins:

Example VII	30 grams	Glidden Polyester 5C-104
Example VIII	30 grams	Glidden Acrylic 4C-104
Example IX	30 grams	Glidden Epoxy 2C-114

30

EXAMPLES X - XVI

Additional coating surface mixture formulas are possible. Using the method as explained in Example I, above, the components may be mixed as follows:

-27-

65 lb/ream paper

	Impregnating Resin	Polymer Particulate	Surfactant	Antifoam	Mineral Particulate	Diluent ¹
	X. Polyester 61 lbs. (dry)	Epoxy 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	as required
	XI. Polyester 61 lbs. (dry)	PVC 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	as required
5	XII. Polyester 61 lbs. (dry)	Acrylic 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	as required
	XIII. Acrylic 61 lbs. (dry)	Polyurethane 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	as required
	XIV. Polyester 61 lbs. (liquid @ 100% solids)	Polyester 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	as required
	XV. Melamine 61 lbs. (dry)	Polyester 1 lb. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	as required
10	XVI. Melamine 61 lbs. (dry)	Polyester 10 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	as required

Example XVII

Any of the resin mixtures provided in Examples I through XVI could be used in a low pressure laminate for a particle board backing layer. A low pressure laminate would be formed using approximately 1 to 2 minute press cycles at approximately 150 to 400 psi and at a platen temperature of about 350° to 400°F. In a low pressure laminate, the polymer particulate may be a reactive resin, for example a polyester with a blocked isocyanate such as MONDUR or an

¹ It may also be desirable to use a suspending or binding agent such as a film forming binder microcrystalline cellulose, hydroxyethyl cellulose, carboxy methyl cellulose or polyvinyl pyrrolidone in quantities of from approximately 1 lb. to 55 lbs. as needed.

-28-

acrylic with a blocked isocyanate or peroxide catalyst.

Examples XVIII - XXIII

The following coating slurries may be used in the methods illustrated in Figures 3.

	Polymer Particulate	Surfactant	Antifoam	Mineral Particulate	Diluent	Binder
	XVIII Epoxy 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	0.0 lbs.	100 lbs. water	5 lbs. CMC ²
	XIX PVC 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	100 lbs. water	5 lbs. CMC
	XX Polyester 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	100 lbs. water	5 lbs. CMC & 2 lbs. Avicel
10	XXI Polyurethane 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	100 lbs. toluene	6 lbs. urethane
	XXII Polyester 45 lbs. (dry)	10 lbs.	1.0 lbs.	5.0 lbs.	100 lbs. water	5 lbs. melamine 5 lbs. HEC ³
	XXIII Acrylic 2 lbs. (dry)	0.01 lbs.	0.04 lbs.	5.0 lbs.	100 lbs. water	2 lbs. melamine resin & 5 lbs. PVP ⁴

Example XXIV

15

A damage resistant coated decorative facing sheet can be created by increasing the content of the substantially uncured resin in Examples XVIII through XXIII to more than 2 lbs., preferably more than 10 lbs., and most preferably to about 45 to 60 lbs. In Examples VI-IX, the quantity of the polymer particulate can be increased to 300 grams and more

² CMC = carboxy methy cellulose

³ HEC = hydroxyethyl cellulose

25 ⁴ PVP = polyvinyl pyroladone

-29-

preferably to 600-900 grams to achieve a damage resistant coated decorative facing sheet. By increasing the weight of particulate resin used, the sheet can be flexed without resulting in damage, thereby decreasing waste in production operations. A laminate can then be formed from the facing sheet without a deleterious affect in the final product. While it may be possible to achieve a damage resistant coated decorative facing sheet using any method of the present invention, it is preferably achieved using the Two Step Coating and Drying Process and the Transfer Sheet Process illustrated in Figures 2 and 3, respectively.

15 Example XXV

A damage resistant coated decorative paper can be created by increasing the content of the surface coating particulate resin in Examples I through XIV to a higher level and decreasing the content of the impregnating resin up to zero pounds. When the impregnating resin content is reduced and the surface coating particulate resin content increased, the polymer particulate will act as both the surface coating resin that melts and flows under heat and pressure and the impregnating resin. The laminate can be prepared in the usual way.

-30-

Example XXVI

When using the methods described in Figure 5 the resin coating formulas for the one step process provided in Examples II - V and Examples X - XVI can be used for coating both sides of the decorative facing sheet. Furthermore, when using the two sided coating of Figure 5, the resin coating formulas of Examples II - V and VII - XIII would be used as the top coating (61). Back coating (63) may be the same formulation without the aluminum oxide.

Example XXVII

When using the dry coating method illustrated in Figure 4, the particle resin can be applied at an application rate of 0.5 lb./ream up to 20 lb./ream. The particle resin that can melt and flow under heat and pressure can be selected from the group consisting essentially of polyester, melamine, acrylic, polyvinyl chloride, epoxy, polyurethane and mixtures of two or more of the foregoing.

The formulation for the impregnating resin composition that is coated on the decorative facing sheet (42) can be formulated to meet the aesthetic, chemical and physical demands of the final products. For example, the formulation provided in Examples I - XVI, without the polymer particulate, is such a suitable formulation.

-31-

What is claimed is:

1. A coated transfer sheet for use with a decorative facing sheet to provide a decorative laminate sheet suitable for pressing, comprising:
 - 5 a transfer release sheet having two exterior surfaces, and
a coating applied to one surface of the transfer release sheet, said coating comprising a surface coating resin that melts and flows
10 under heat and pressure during lamination to impart one or more of the following properties: enhanced wearability, chemical, thermal, or ultra-violet radiation resistance or abrasion resistance.
- 15 2. A transfer sheet in accordance with claim 1, wherein the surface coating resin is a polymer selected from the group consisting essentially of polyester, polyurethane, epoxy, polyvinyl chloride, acrylic, and mixtures of two or more of the
20 foregoing.
3. A transfer sheet in accordance with claim 1, wherein said coating further includes a mixture of an abrasion resistant hard mineral having a particle size of between about 1-200 microns in a
25 concentration sufficient to provide abrasion resistance without interfering with visibility.

-32-

4. A transfer sheet in accordance with claim 3, wherein said abrasion resistant hard mineral particles are selected from the group consisting essentially of alumina, silica, zirconium oxide, cerium oxide, glass beads, diamond dust and mixtures of two or more of the foregoing.

5. A decorative laminate sheet produced from the transfer sheet prepared in accordance with claim 1.

10 6. A method for providing a decorative laminate sheet suitable for pressing from a decorative facing sheet, said laminate sheet having a surface coating, said method comprising:

15 (a) impregnating the decorative facing sheet with an impregnating resin;

(b) preparing a coating surface dispersion of at least one coating resin that melts and flows under heat and pressure, suspended in a diluent with a suitable binding material, said binding material being compatible with said impregnating resin and capable of withstanding subsequent laminating conditions and said coating resin being dissimilar from said impregnating resin;

25 (c) coating on a first exterior surface of a laminate transfer sheet with said dispersion,

-33-

such that a surface coating layer of said coating resin is provided in an amount of from about one pound to ten pounds per ream of the transfer sheet;

5 (d) drying said coating in a manner such that said coating resin is bound to the exterior surface of said transfer sheet;

(e) placing said coated transfer sheet onto the resin impregnated decorative facing sheet with the exterior surface coated having
10 the surface dispersion adjacent to the impregnated decorative facing sheet to obtain a decorative laminate sheet suitable for pressing.

15 7. The method according to claim 6, wherein the step of preparing a coating surface dispersion further comprises selecting a resin that melts and flows under heat and pressure selected from the group consisting essentially of polyester,
20 polyurethane, epoxy, polyvinyl chloride, acrylic and mixtures of two or more of the foregoing.

8. The method according to claim 7, wherein said coating dispersion further includes a mixture of an abrasion resistant hard mineral having a
25 particle size of between 1-200 microns in

-34-

concentrations sufficient to provide abrasion resistance without interfering with visibility.

9. The method according to claim 8, wherein said abrasion resistant mineral particles are
5 selected from the group consisting essentially of alumina, silica, zirconium oxide, glass beads, diamond dust and mixtures of two or more of the foregoing.

10. The method according to claim 9, wherein
10 said impregnating resin is melamine and said abrasion resistant mineral is alumina which is chemically bound to said melamine with a silane.

11. A laminate produced from the decorative laminate sheet prepared in accordance with claim 6,
15 wherein the decorative laminate sheet is laminated to a backing layer under heat and pressure.

12. A method for providing a decorative laminate sheet suitable for pressing from a decorative facing sheet, said laminate sheet having
20 a surface coating, said method comprising:

(a) coating a decorative facing sheet with a liquid impregnating resin coating mixture;
and

(b) depositing surface coating resin
25 particulates that melt and flow under heat and

-35-

pressure onto the coated decorative facing
sheet; and

(c) drying the coated decorative facing
sheet having particulate deposits to obtain a
5 decorative sheet suitable for pressing.

13. The method according to claim 12, wherein
the step of depositing surface coating resin
particulates onto the decorative facing sheet
further comprises selecting the particulate resin
10 from the group of polymers consisting essentially of
polyester, polyurethane, epoxy, polyvinyl chloride
acrylic and mixtures of two or more of the
foregoing.

14. A laminate produced from the decorative
15 laminate sheet prepared in accordance with claim 12,
wherein the decorative laminate sheet is laminated
to a backing layer under heat and pressure.

15. A method for providing a decorative
laminate sheet suitable for pressing from a
20 decorative facing sheet, said method comprising:

(a) providing a decorative facing sheet
having a top external surface and a bottom
external surface;

(b) applying a first slurry mixture
25 comprising surface coating resin particulates
to one of the surfaces;

-36-

(c) applying a second slurry mixture comprising an impregnating resin to the other surface;

(d) drying the coated decorative sheet having particulate deposits to obtain a decorative sheet suitable for pressing.

16. The method of claim 15 wherein the first and second slurries have different compositions.

17. The method of 16 wherein the first and second slurries have the same composition.

18. The method of claim 16 wherein the first slurry comprises melamine.

19. The method of claim 14 wherein the first slurry comprises at least two dissimilar resins, one of said resins being a liquid melamine impregnating resin and the other being a surface coating resin that melts and flows under heat and pressure during lamination to form a laminating surface having one or more of the following properties: enhanced versatility, chemical, thermal, ultra-violet radiation resistance or abrasion resistance.

20. A laminate produced from the decorative laminate sheet prepared in accordance with claim 14, wherein the decorative laminate sheet is laminated to a backing layer under heat and pressure.

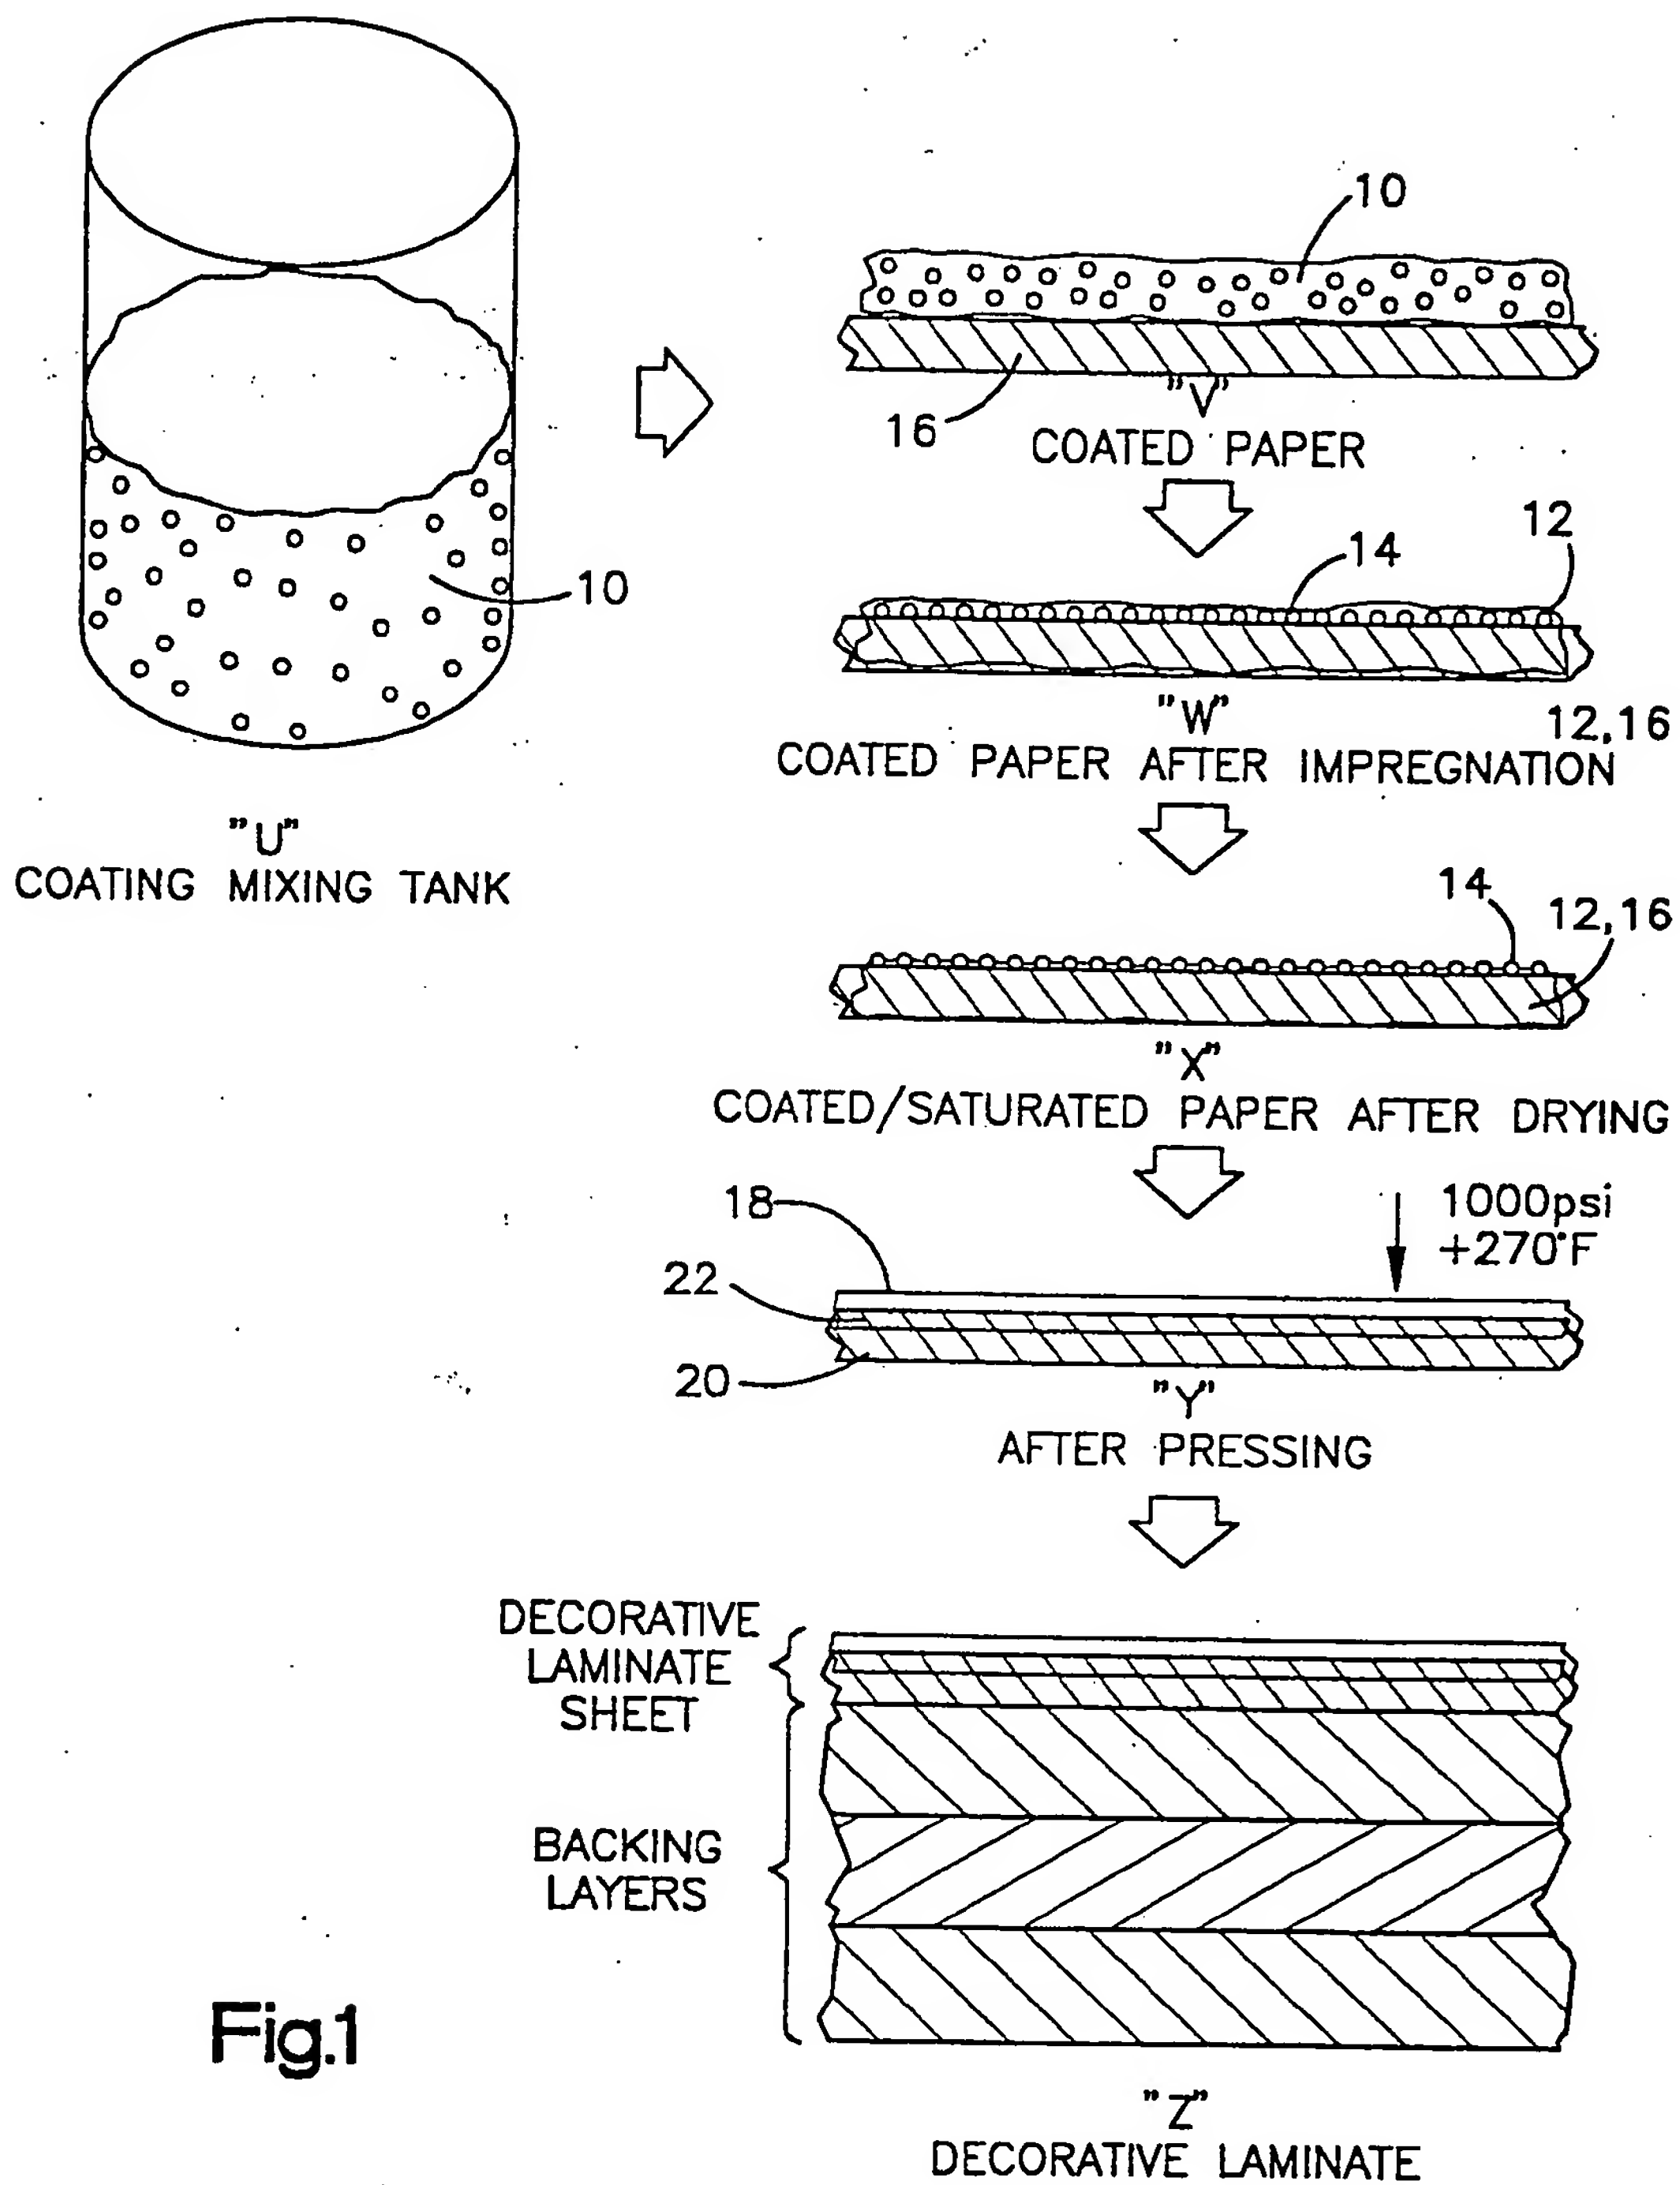


Fig.1

2/3

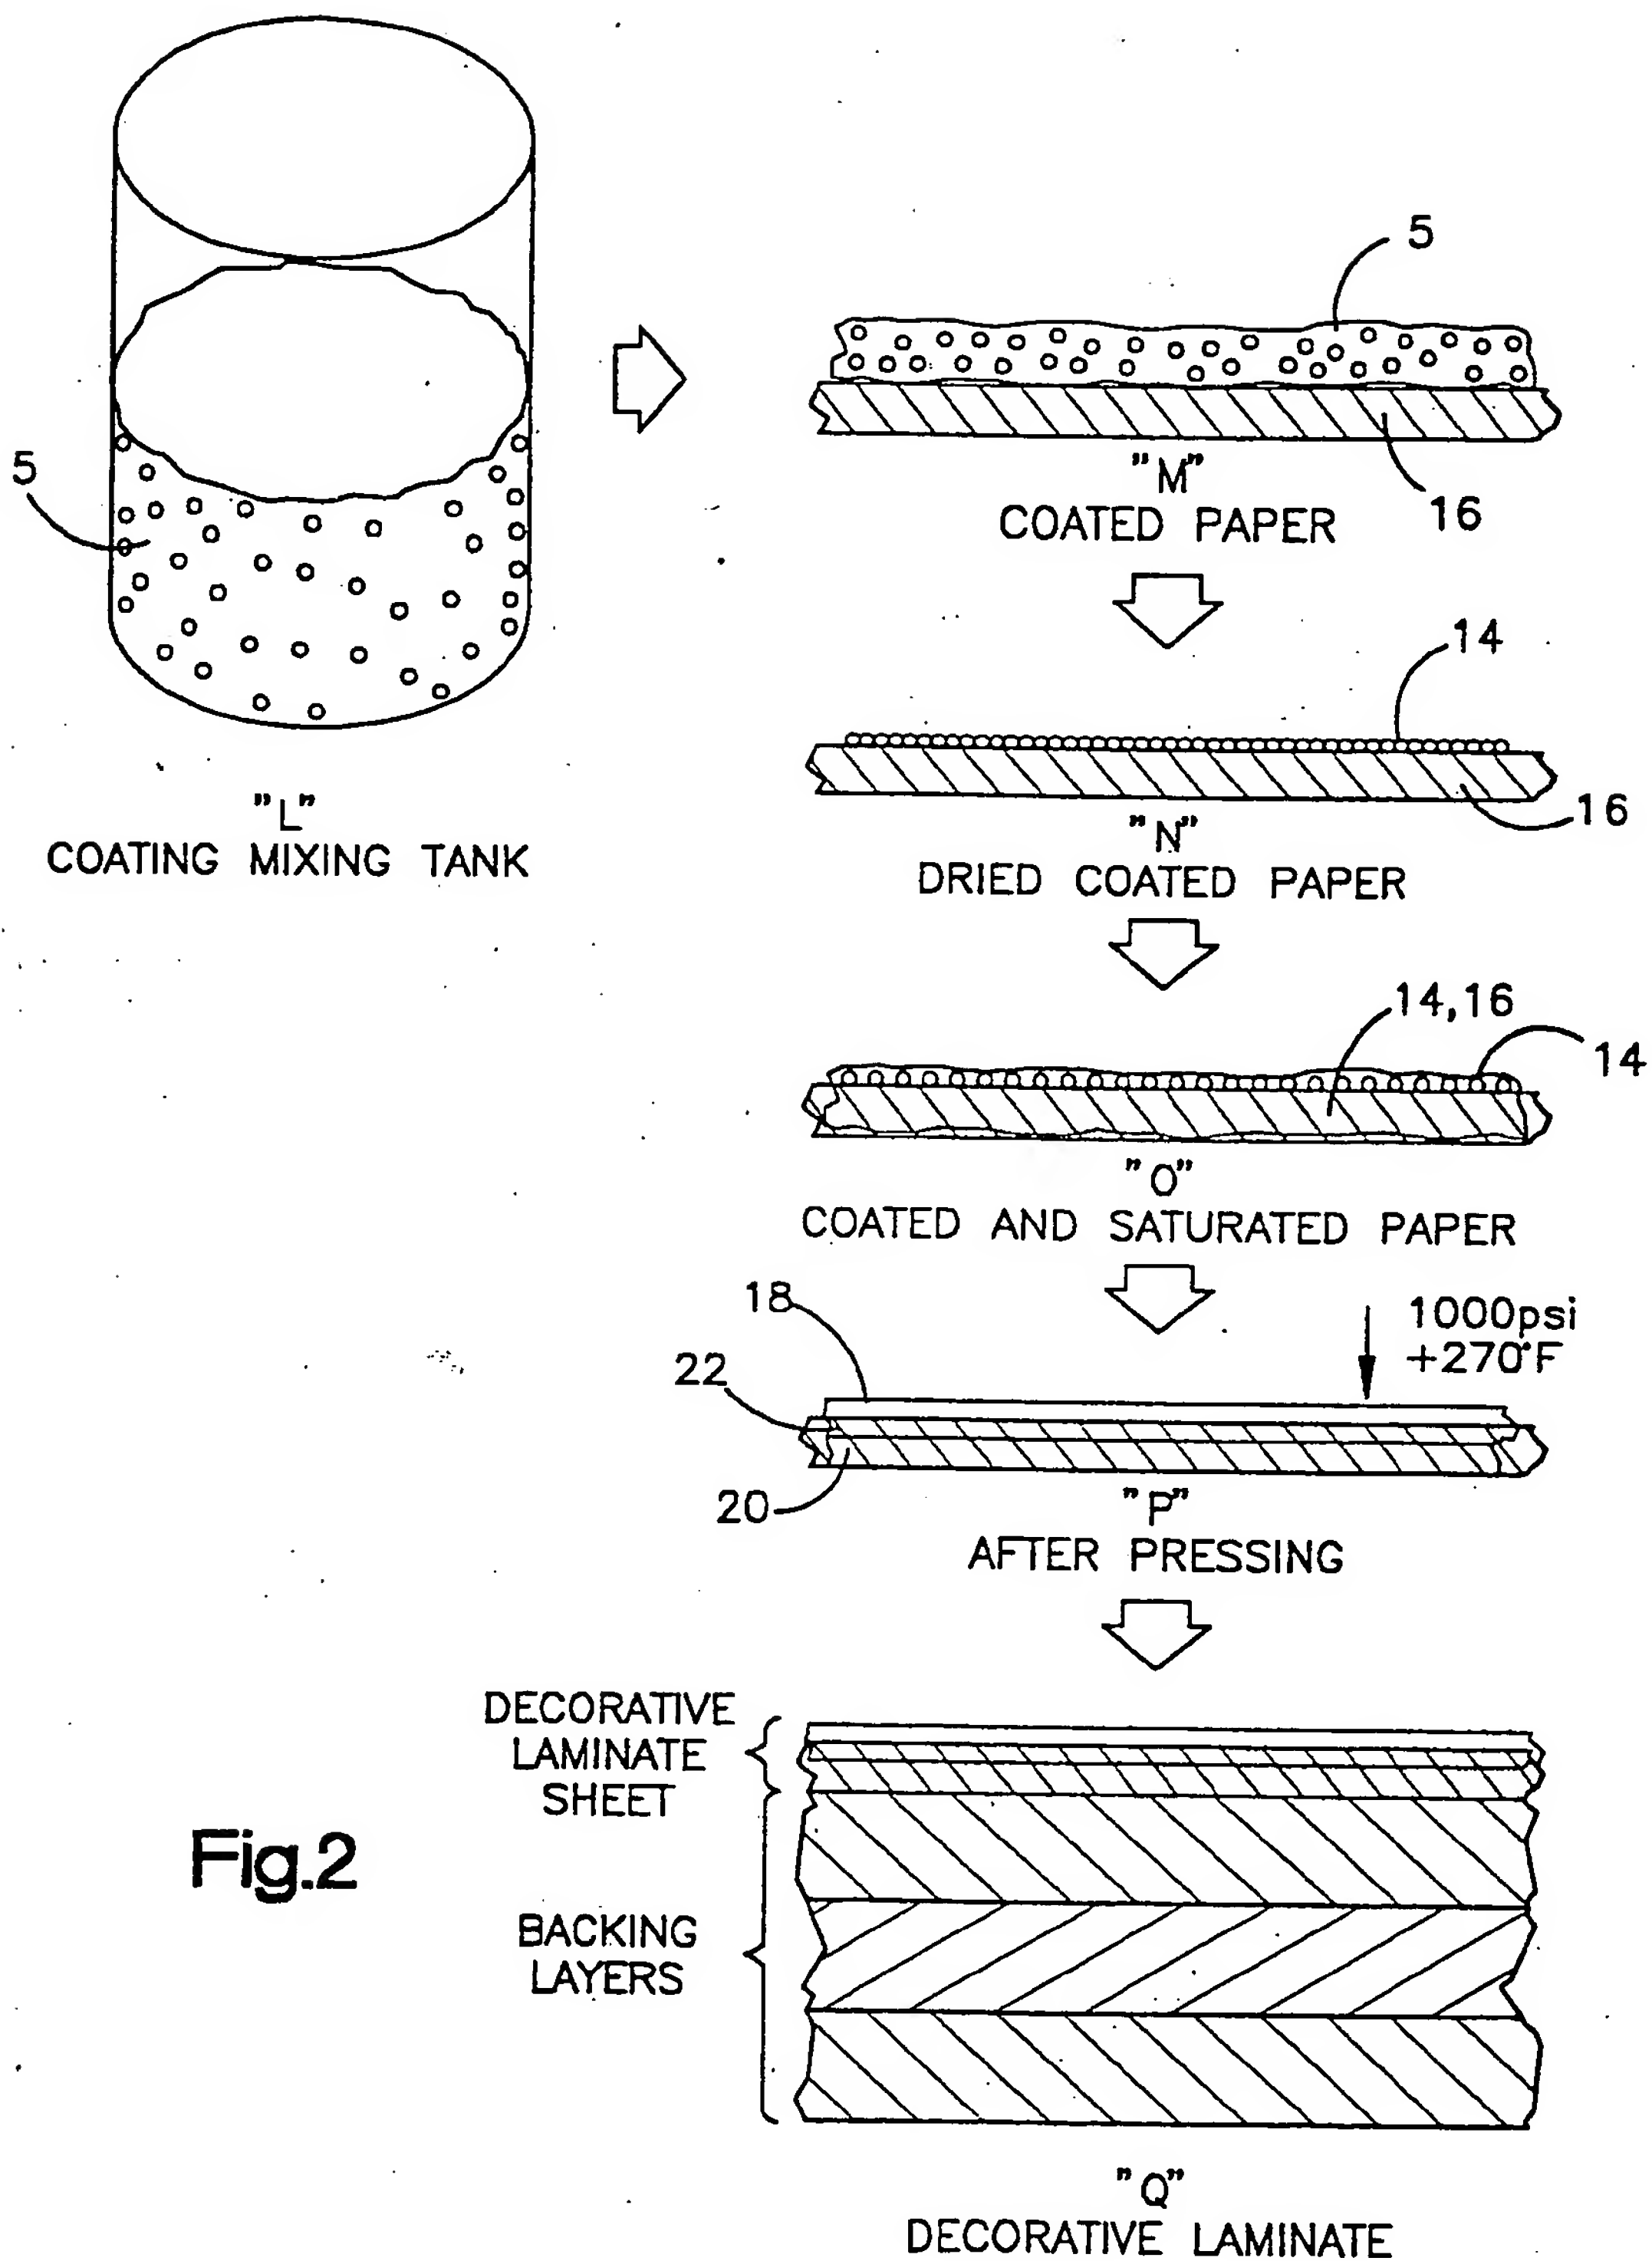


Fig.2

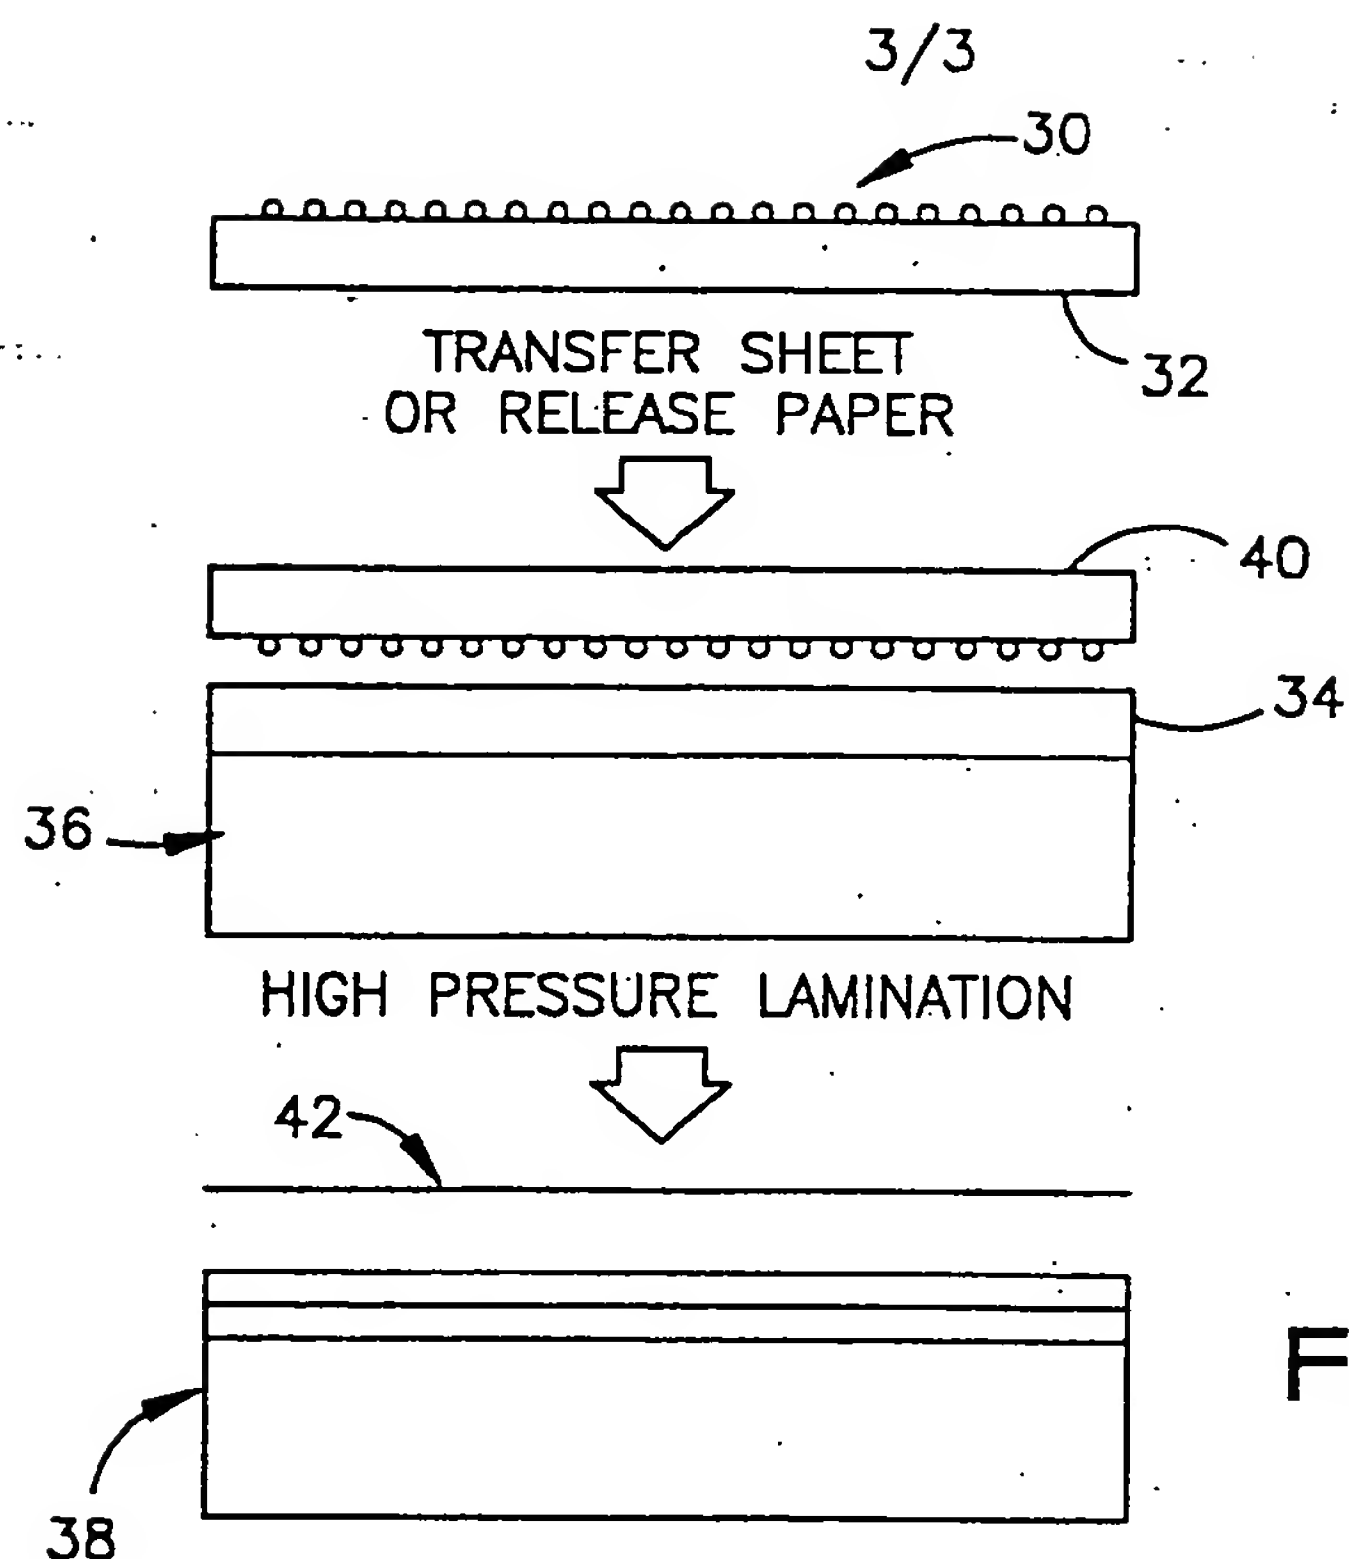


Fig.3

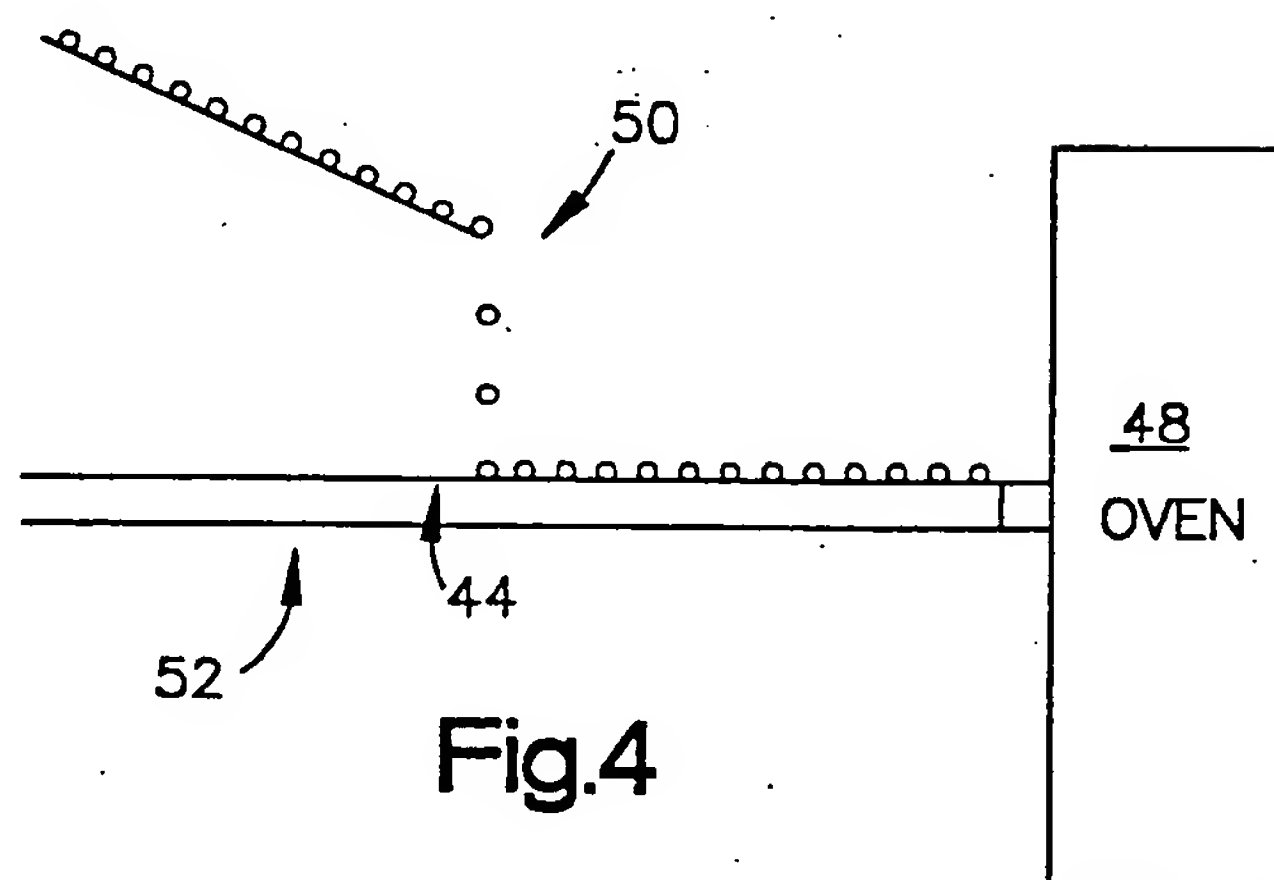


Fig.4


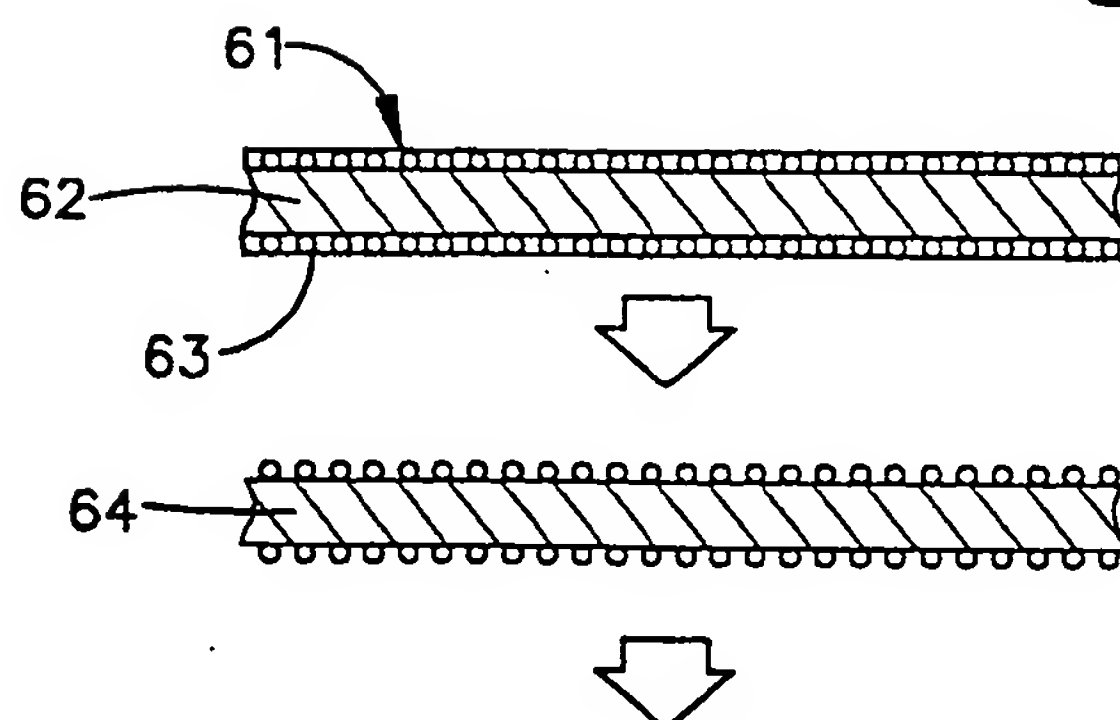


Fig.5

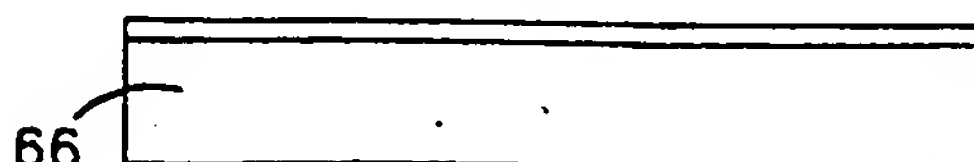

SUBSTITUTE SHEET (RULE 26)

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 B44C5/04 D21H27/26 B32B27/08		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 B44C D21H		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,4 765 858 (H. F. E. VANKERCKHOVEN ET AL) 23 August 1988 see column 2, line 21 - column 5, line 63 ---	1,5,6,11
X	US,A,4 376 812 (W. W. WEST) 15 March 1983 see column 3, line 6 - column 7, line 66; example 1 ---	1,5,6, 11,12, 14,20
X	EP,A,0 189 070 (TECHNOGRAPHICS FITCHBURG COATED PRODUCTS INC.) 30 July 1986 see page 8, paragraph 3 - page 13, paragraph 1; example 1 ---	1-5
A	--- -/--	6-9,11
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">20 December 1994</div>	Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">31. 01. 95</div>	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer <div style="text-align: center; font-weight: bold;">Doolan, G</div>	

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO,A,93 01935 (NEVAMAR CORPORATION) 4 February 1993 see page 5, line 29 - page 13, line 12; examples 1-13 ---	12-16, 19,20
X	US,A,4 726 986 (D. L. CANNADY ET AL) 23 February 1988 see column 1, line 50 - column 7, line 60; example 1 -----	12-14, 19,20

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.